



RELLENO INSTALADO A 800 mm DEL SUELO (INCLUIDO SOPORTE TORRE)

TOWER TYPE MODELO TORRE	NET WEIGHT (kg) PESO EN VACIO (kg)	OPERATION WEIGHT (kg) PESO EN VACIO (kg)
EWK-D 680	2450	5520

	INLET ENTRADA	OUTLET SALIDA
STANDARD	FRONT SIDE CARA FRONTAL	LEFT SIDE CARA IZQUIERDA
OPTIONAL	-	FRONT SIDE CARA FRONTAL
OPTIONAL	-	BOTTOM SIDE CARA INFERIOR

TOWER TYPE MODELO TORRE	POWER MOTOR (Kw) POTENCIA MOTOR (kw)	VELOCITY AIR (m/s) SALIDA (m/s)
EWK-D 680/2	15,0 Kw	2,8 m/s
EWK-D 680/3	18,5 Kw	3,0 m/s
EWK-D 680/4	22,0 Kw	3,2 m/s

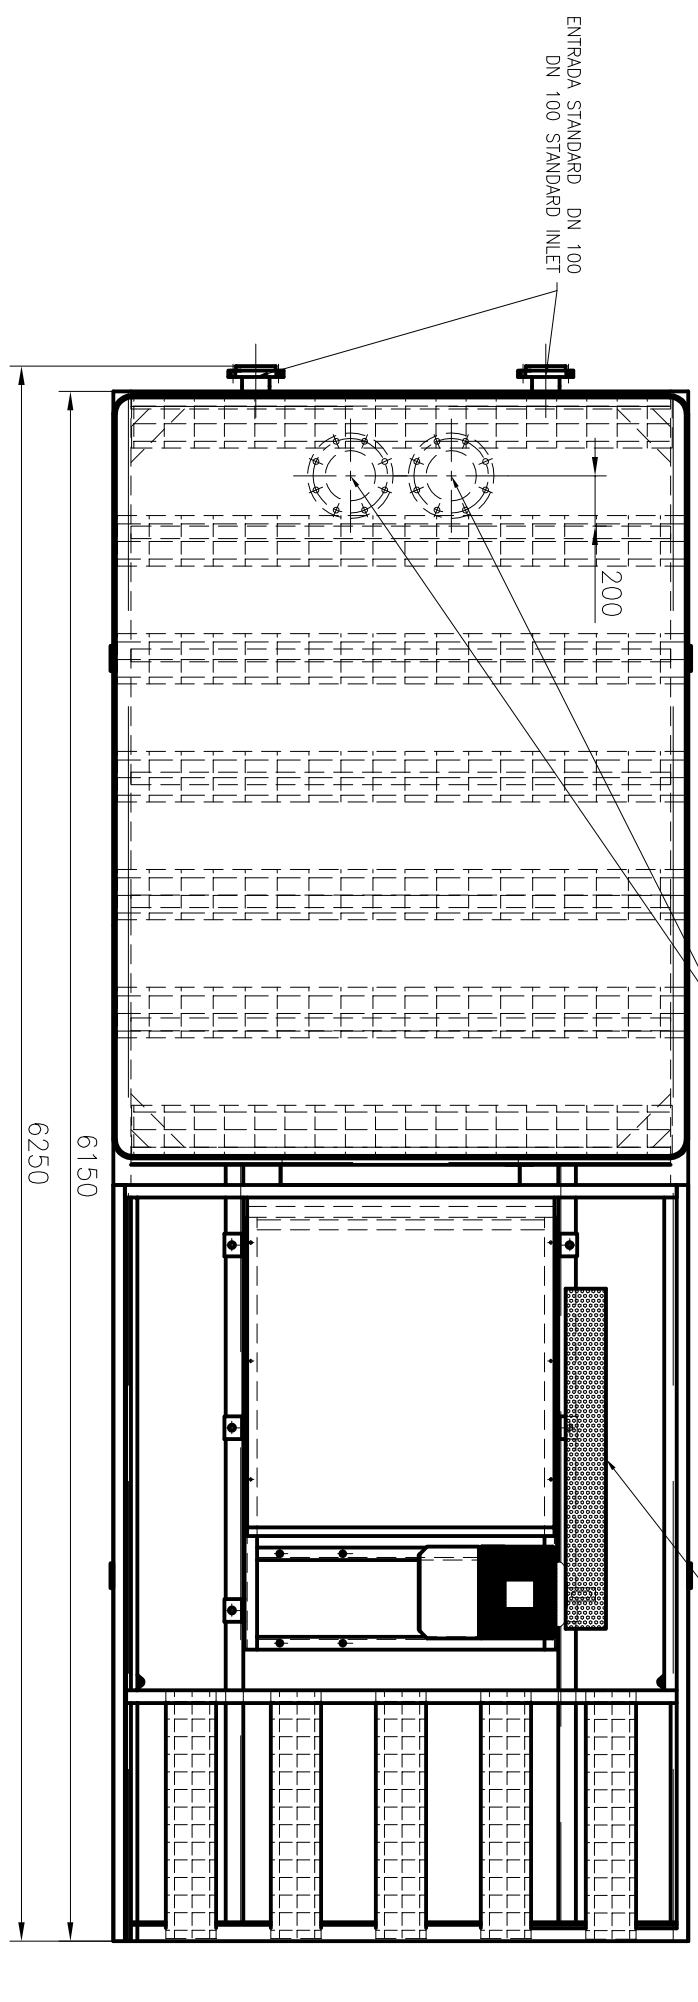

ESCALA 1:30
U.DIM. mm

TORRE REFRIGERACION CENTRIFUGA EWK-DA 680
CENTRIFUGAL COOLING TOWER EWK-DA 680

PLANO: EWK-DA 680